




SERIE 66

- * Fissare con Loctite 542 col. ROSSO
- * Affix with Loctite 542 col. RED
- * Fixer avec de la Loctite 542 couleur ROUGE
- * Mit Loctite 542 ROT befestigen
- * Fijar con Loctite 542 col. ROJO
- * Fixar com Loctite 542 cor. VERMELHA

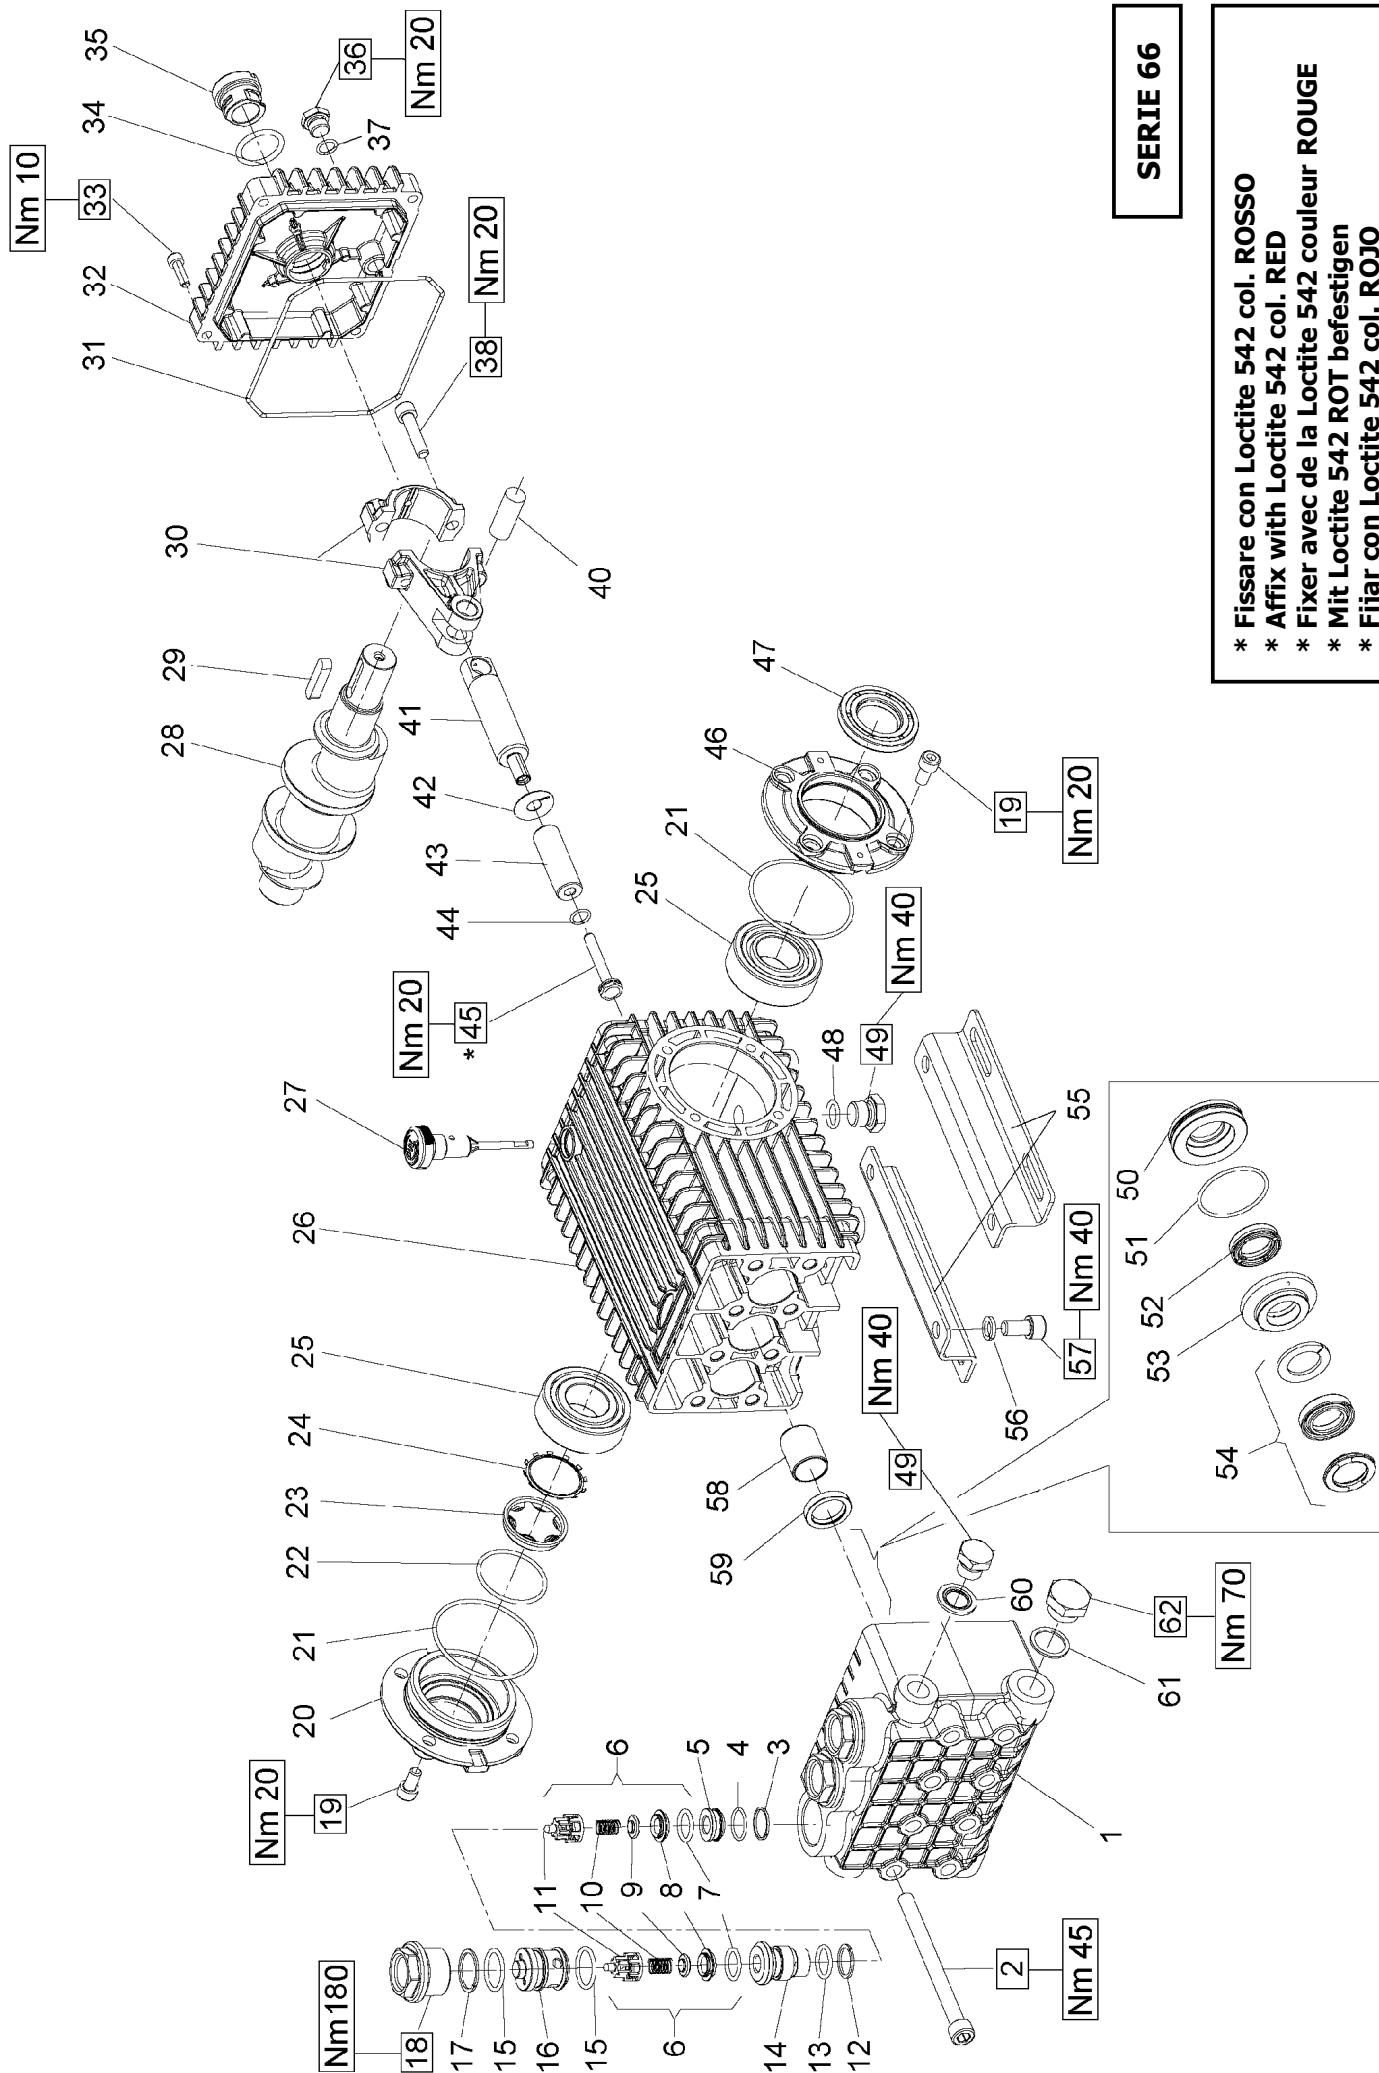

W5015 – W4518 – W4015 – W4018 – W3521
W3523 - T4018 – W5018 – T5018

PISTONE – PISTON Ø16		PISTONE – PISTON Ø18
OTTONE BRASS	W5015 – W4518 W4015 - W4018 T4018	W3521 – W3523
NICKEL	W5018 – T5018	

POS	COD.	DESCRIZIONE – DESCRIPTION - KIT	NR
1	66.1210.41	Testata Ø 16	1
	66.1211.41	Testata Ø 18	1
	66.1240.41	Testata Ø 16 – W5015 – W4518	1
	66.1247.41	Testata Ø 16 – NICKEL	1
2	99.3820.00	Vite M10x120 UNI 5931	8
3	90.5118.00	Anello antiestr. Ø 19.5x22x1.5	3
4	90.3596.00	OR Ø 18.77x1.78 (2075)	3
5	66.2102.70	Distanziale	3
6	36.7121.01	Gruppo valvola aspiraz. / mand.	150 6
7	90.3841.00	OR Ø 17.13x2.62 (3068)	150 6
8	36.2003.66	Sede valvola	150 6
9	36.2032.66	Valvola sferica	150 6
10	94.7376.00	Molla Ø 9.4x14.8	150 6
11	36.2025.51	Guida valvola	150 6
12	90.5115.00	Anello antiest. Ø 18.7x23x1.5	3
13	90.3843.00	OR Ø 17.86x2.62 (123)	3
14	66.2101.66	Bussola	3
15	90.3857.00	OR Ø 23.81x2.62 (132)	6
16	66.2100.70	Tappo Ø 29	3
17	90.5165.00	Anello antiest. Ø 24.7x29x1.5	3
18	66.1301.41 66.1310.41	Tappo valvole M32x1.5x18.5 Tappo valvole M32x1.5x18.5 - NICKEL	3 3

KIT RICAMBI – SPARE KITS

PISTONE – PISTON Ø16			PISTONE – PISTON Ø18		
KIT Nr.	KIT 2	KIT 3	KIT 174	KIT 175	KIT 180
Posizioni include Positions included	59	47	52 - 54	50 – 51 52 – 53 54	52 - 54 50 – 51 52 – 53 54
Nr. Pcs.	3	2	3	1	3

POS	COD.	DESCRIZIONE – DESCRIPTION - KIT	NR	POS	COD.	DESCRIZIONE – DESCRIPTION - KIT	NR
19	99.3039.00	Vite M8x16 UNI 5931	8	42	96.7101.00	Rosetta Ø 10x28x0.5	3
20	47.1512.22	Coperchio cuscinetto lato spia	1	43	66.0402.09 66.0403.09	Pistone Ø 16x54 Pistone Ø 18x54	3 3
21	90.3913.00	OR Ø 67.95x2.62 (3268)	2	44	90.3584.00	OR Ø 10.82x1.78 (2043) – 90 Sh.	3
22	90.3877.00	OR Ø 39.34x2.62 (3156)	1	45	66.2195.66	Vite fissaggio pistone	3
23	70.2118.01	Spia livello olio	1	46	47.1510.22	Coperchio cuscinetto aperto	1
24	90.0756.00	Anello seeger Ø 45	1	47	90.1648.00	Anello rad. Ø 30x56x7	3 1
25	91.8380.00	Cuscinetto a rulli NJ 2206 EC	2	48	90.3833.00	OR Ø 13.95x2.62 (3056)	1
26	66.0100.22	Carter pompa	1	49	98.2100.00	Tappo G 3/8"x13	2
27	98.2106.00	Tappo carico olio	1	50	66.0802.70 66.0803.70	Anello di fondo Ø 16 Anello di fondo Ø 18	175 3 176 3
28	66.0200.35 66.0204.35	Albero – W5015–W4015–W3521–T4018–T5018 Albero – W4518–W4018–W3523–W5018	1 1	51	90.3616.00	OR Ø 34.65x1.78 (2137)	175-176 3
29	91.4892.00	Linguetta 9x7x35 UNI 6604	1	52	90.2631.00 90.2652.00	Anello tenuta Ø 16x24x6.5 LP 174-175 Anello tenuta Ø 18x26x6.5 LP 180-176	3 3
30	66.0300.01	Biella completa	3	53	66.2162.70 66.2163.70	Anello intermedio Ø 16 Anello intermedio Ø 18	175 3 176 3
31	90.3922.00	OR Ø 133.02x2.62 (3525)	1	54	90.2634.00 90.2655.00	Anello tenuta Ø 16x26x9.5 HP 174-175 Anello tenuta Ø 18x28x10 HP 180-176	3 3
32	66.1600.22	Coperchio posteriore	1	55	47.2000.74	Piedino fissaggio pompa	2
33	99.1884.00	Vite M6x20 UNI 5931	4	56	96.7106.00	Rosetta Ø 10.2 DIN 7980	4
34	90.4051.00	OR Ø 26.58x3.53 (4106)	1	57	99.3644.00	Vite M10x18 UNI 5931	4
35	63.2100.51	Spia livello olio	1	58	90.9126.00	Boccola Ø 22x25x30	3
36	98.2041.00	Tappo G 1/4"x9	1	59	90.1625.00	Anello rad. Ø 22x32x5.5	2 3
37	90.3585.00	OR Ø 10.82x1.78 (2043)	1	60	93.1858.00	Rondella di tenuta G 3/8" Ø 15x27x2	1
38	99.3099.00	Vite M8x35 UNI 5931	6	61	96.7514.00	Rosetta Ø 21.5x27x1.5	1
40	97.7405.00	Spinotto Ø 14x39	3	62	98.2176.00	Tappo G 1/2"x10	1
41	66.0500.66	Guida pistone	3				