

**BE**

# AIR-CONDITIONER

---



## **BGK1801-27**

---

Compressor overload shut-off protection

Motor overheating protection

Compressor time delay program; two speed fan

Washable filters

360° direction wheel convenient for portable with lock

Appliances Area: Factory, office, Restaurant,

Warehouse, Computer room etc

### Universal wheel design


All models are wheel-moving design, easy to install in corners and other small spaces.



### Bucket design




### Cold and heat separate design Improving cooling effect

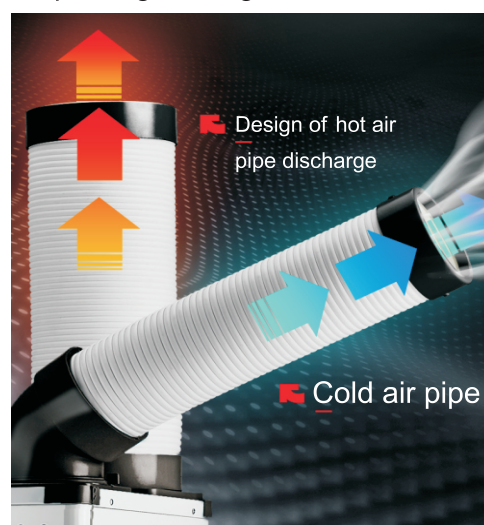

**BGK1801-45**

**BGK1801-65**

Model	BGK1801-27	BGK1801-45	BGK1801-65	
Power	220-240V 50Hz	220-240V 50Hz	220-240V 50Hz	
Refrigerating capacity	KW	2.7	4.5	6.5
	BTU	9200	15300	22200
Cool air volume (m <sup>3</sup> /h)		460	800	1200
	(KW)	0.95	2	3
Current ( A )	4.2	9	13.5	
Water Tank ( L )	5	8	13	
product size ( mm )	405 *430 *855	520 *480 *1035	630 *560 *1245	
packing size ( mm )	484 *515 *965	610 *570 *1110	740 *660 *1730	
Additional parts box(mm)		370*350*260	380*280*515	
G.W. ( Kg )	47	75	155	
N.W. ( Kg )	42	70	100	
operation condition	18-45°C	18-45°C	18-45°C	

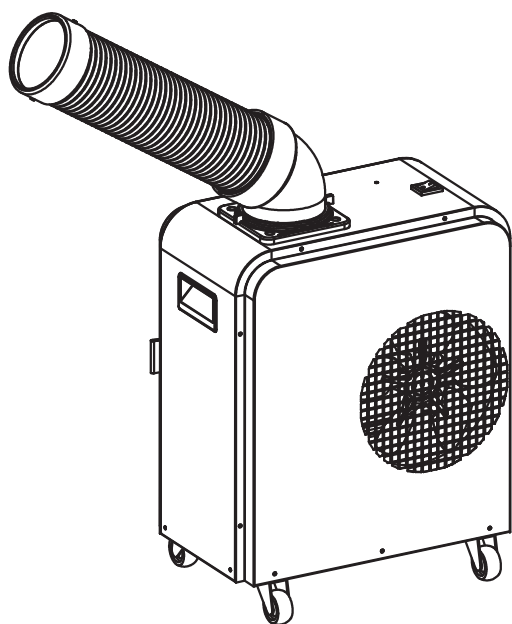

**BGK1901-20**

### Universal wheel design

All models are wheel-moving design, easy to install in corners and other small spaces.




### Bucket design



### Convenient cleanable filter



Model		BGK1901-20
Power		220-240V 50Hz
Refrigerating capacity	KW	2
	BTU	6800
Cool air volume	(m <sup>3</sup> /h)	350
	(KW)	0.7
Current (A)		3.2
Water Tank (L)		3
product size (mm)		465x260x590 mm
packing size (mm)		515x310x710 mm
G.W. (Kg)		25kg
N.W. (Kg)		23kg
operation condition		18-45°C

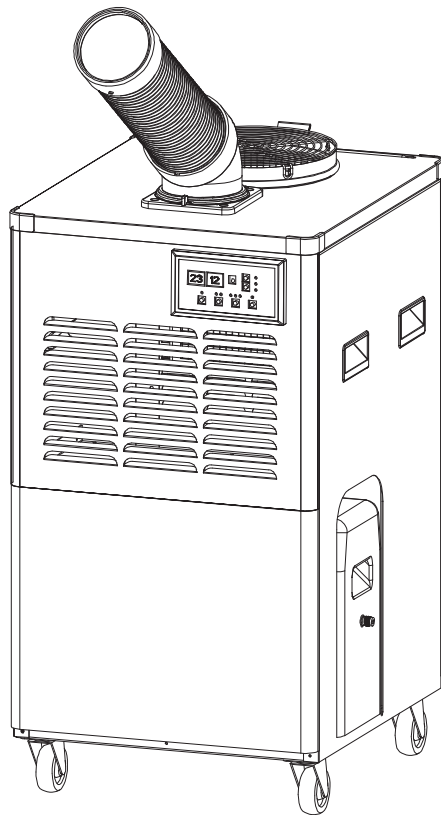


**BGK1901-38**

smart PCB control.



Convenient cleanable filter

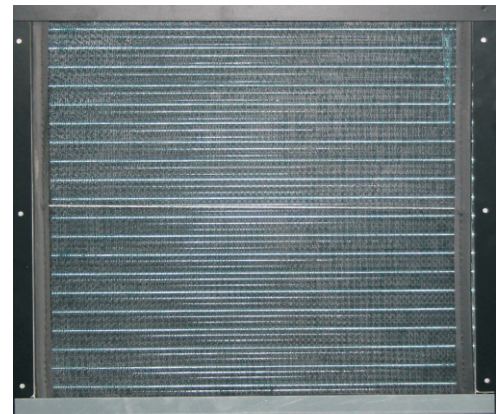

High Voltage protection switch



Model	BGK1901-38	BGK1901-62	BGK1901-71	
Power	220-240V 50Hz	220-240V 50Hz	220-240V 50Hz	
Refrigerating capacity	KW	3.8	6.2	7.1
	BTU	13000	21000	24200
Cool air volume (m <sup>3</sup> /h)		500	1000	1200
	(KW)	1.5	2.4	3
Current (A)	6.8	10.8	13.8	
Water Tank (L)	25	25	25	
product size (mm)	496x562x943 mm	600x560x1125 mm	615x640x1125 mm	
packing size (mm)	575x650x1053 mm	650x720x1300 mm	705x720x1300 mm	
G.W. (Kg)	60kg	90kg	130kg	
N.W. (Kg)	55kg	80kg	90kg	
operation condition	18-45°C	18-45°C	18-45°C	