


2" MINE SPEC FIRE FIGHTING PUMP

SKU:124 HD20480-YEJMP MINE

Max Flow 400 L/min flow rate
Max Head 60 m
Yanmar L48, 4.8 hp electric start diesel engine

BE

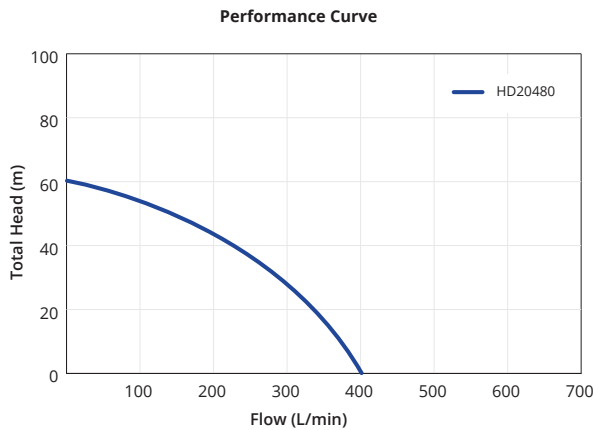

BE 2" Yanmar Diesel High Pressure Mine Spec Fire Pump

**Mine spec option pictured*

BE "Yanmar Powered" super high-pressure Fire Commander pumps are available with diesel drive making them safer to use for fire duties as diesel is less flammable than petrol.

These pumps are designed with extraordinary performance, quality components and for ease of service. BE is the choice of mines, quarries and professional firefighting authorities around the world.

Performance

- 400 L/min. flow rate
- 60 m total head
- 7.6 m suction lift

Pump Features

- Pump body & impeller made from high quality marine grade aluminum
- 2" BSP male suction port
- 3 way outlet featuring 2 X 1" & 1 x 1.5" outlet
- Standard with viton seals & gaskets
- Extended 3 year pump end warranty

Unit & Frame

- Robust galvanised frame with anti-vibration mounts

Engine

- Yanmar L48 electric start single cylinder air cooled diesel engine, 4.8 hp with recoil back up
- 2.4 L fuel tank
- Low oil alert
- Air cooled direct injection designed with Yanmar proprietary technology providing low fuel consumption

Mine Spec Inclusions

- Integrated fire extinguisher
- Emergency stop
- Lockable battery isolation
- Gel battery in enclosed box
- Galvanized frame
- Yanmar electric start diesel engine

Applications

- Fire fighting, mop up & general fire protection
- High pressure water transfer
- Machinery wash down
- Diesel fuel transfer
- High pressure spraying

